

DANOX MIG-250S

ORIGIN CHINA

Danox
WELDING PTE LTD



Specifications

- MMA/MIG/LIFT TIG
- Gas/Gasless FCAW
- Digital display for current and voltage
- Inductance adjustment
- Built-in Hot start
- Built-in Arc force
- O.C./O.H. protection
- 2T/4T/spot
- VRD
- Diameter selection
- Material selection



Direct Current
Output



50/60 Hz Input
Power Source



Forced
Air Cooling



Energy Saving
And Environment
Friendly

Features

- High mobility with integrated trolley
- Impact resistance housing with 15kg wire spool accepted
- Adjustable inductance for controlling arc to optimize weld performance
- Digital display for current and voltage
- High welding efficiency



Functions

Standard

- MIG/MAG/MMA
- Gas/gasless FCAW
- Built-in hot start
- Built-in arc force
- Voltage & current digital display meter
- Burn back
- O.H. indicator
- Spool gun interface

Singapore HQ

Blk 6 Marsiling Industrial Estate Road 1
#01-14 Singapore 739275
www.danoxwelding.com
sales@danoxwelding.com
Tel: 6756 2801 WA: 9850 1419

Myanmar

Law Kar Main Road (19/A) No. 3/427
South Dagon Township, Yangon, Myanmar
www.danoxwelding.com
sales@danoxwelding.com
WA: +95 9 40003 5177

Indonesia- Pt. Inti Bangunan Perkasa

No. 15-17 Jalan Pelita 1, Batam, Kepulauan Riau
29453
Retail
Blok D, No. 5 Jalan Pembangunan 2, Komplek
Batama, Batam, Kepulauan Riau- 29432

DANOX MIG-250S

ORIGIN CHINA

Danox
WELDING PTE LTD

Features

- MCU digital control achieves intelligent synergic welding.
- Digital interface and synergic welding make operation easier for users.
- Adjustable inductance for controlling arc to optimize weld performance.
- Compact and portable with 5kg size wire spool accepted.
- Convertible polarity for Gas Metal Arc Welding and Flux Cored Arc Welding.
- Automatic saving of welding parameters.
- Equipped with an intelligent-control fan system.
- High welding efficiency.
- Thin plate welding as thin as 1mm.


Accessories

- MB15-3Mtrs Mig Torch with complete full accessories
- 300Amp Earth Clamp with 3mtrs standard black cable, 35-50 plug
- CO2 Regulator with flowmeter



Optional Accessories

- 300Amp Electrode Holder with 3mtrs standard black cable, 35-50 plug
- WP26V-25 Scratch Tig Torch with complete full accessories
- Argon Regulator with flowmeter

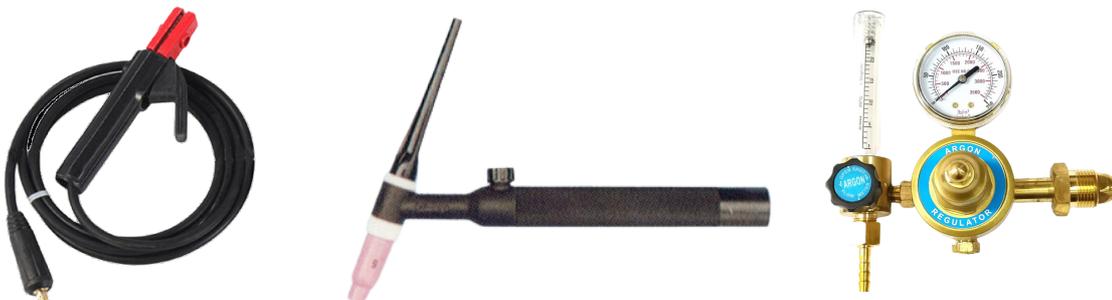

Singapore HQ

Blk 6 Marsiling Industrial Estate Road 1
#01-14 Singapore 739275
www.danoxwelding.com
sales@danoxwelding.com
Tel: 6756 2801 WA: 9850 1419

Myanmar

Law Kar Main Road (19/A) No. 3/427
South Dagon Township, Yangon, Myanmar
www.danoxwelding.com
sales@danoxwelding.com
WA: +95 9 40003 5177

Indonesia- Pt. Inti Bangunan Perkasa

No. 15-17 Jalan Pelita 1, Batam, Kepulauan Riau
29453
Retail
Blok D, No. 5 Jalan Pembangunan 2, Komplek
Batama, Batam, Kepulauan Riau- 29432

DANOX MIG-250S

ORIGIN CHINA



Technical Data

Model	MIG-250S
Input power source	AC230V/1PH \pm 10% 50/60HZ
Input Current (A)	52
Input Power (KVA)	12
MMA Output Current (A)	10 - 220
MIG Output Current (A)	30 - 250
Wire Speed (m/min)	1.5 - 16
No-Load Voltage (V)	52
Duty Cycle (%) @ 40°C	35
Efficiency (%)	85
Power Factor	0.9
Protection Class	IP21S
Insulation Class	F
Dimension (mm)	900 x 450 x 755
Weight (Kg)	47

Singapore HQ

Blk 6 Marsiling Industrial Estate Road 1
#01-14 Singapore 739275
www.danoxwelding.com
sales@danoxwelding.com
Tel: 6756 2801 WA: 9850 1419

Myanmar

Law Kar Main Road (19/A) No. 3/427
South Dagon Township, Yangon, Myanmar
www.danoxwelding.com
sales@danoxwelding.com
WA: +95 9 40003 5177

Indonesia- Pt. Inti Bangunan Perkasa

No. 15-17 Jalan Pelita 1, Batam, Kepulauan Riau
29453
Retail
Blok D, No. 5 Jalan Pembangunan 2, Komplek
Batama, Batam, Kepulauan Riau- 29432