




KEY FEATURES

- INVERTER IGBT ADJUSTABLE
- ARC FORCE EASY IGNITION
- STABLE ARC
- LOW SPATTER
- ENERGY SAVING
- HIGH EFFICIENCY
- SUITABLE FOR ACIDIC & NORMAL ELECTRODES
- TIG WELDING FUNCTION AVAILABLE

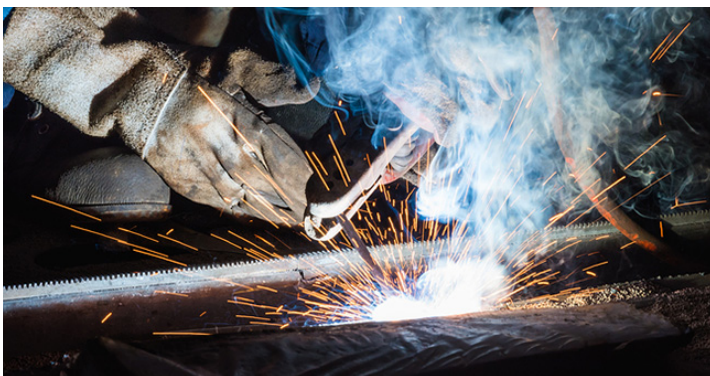

Specifications

| | |
|------------------|-------------|
| Model | DC-400 |
| Power voltage | AC 440±10% |
| Frequency | 50/60 Hz |
| No-load voltage | 65V |
| Output current | 40-250A |
| Rated output (V) | 30V |
| Duty Cycle | 60% |
| Efficiency | 85% |
| Power factor | 0.73 |
| Insulation grade | F |
| Protection grade | IP21 |
| Weight | 15 |
| Dimension mm | 454*206*368 |
| Electrode φ mm | 2.5-4.0 |

Come with accessories

- 3 Meters Earth Clamp with standard cable
- 3 Meters Electrode Holder with standard cable



Optional accessories

- 300 Ampere Orange Welding Cable (100% Copper)
- 8 Meters WP26V-25 Scratch Tig Torch Complete with accessories & Sleeve
- Argon Regulator with flowmeter



Singapore HQ
Blk 6 Marsiling Industrial Estate Road 1
#01-14 Singapore 739275

Showroom
No. 3 Soon Lee Street, Pioneer
Junction #01-37 Singapore 627606

Myanmar
No. 760A, Pyi Htaung Su, Main Road
65 Quarters, Industrial Zone (2) South Dagon
Yangon, Myanmar

www.danoxwelding.com
sales@danoxwelding.com

Indonesia- Pt. Inti Bangunan Perkasa
No. 15-17 Jalan Pelita 1, Batam, Kepulauan Riau
29453

Retail
Blok D, No. 5 Jalan Pembangunan 2, Komplek
Batama, Batam, Kepulauan Riau- 29432