




FUNCTIONS

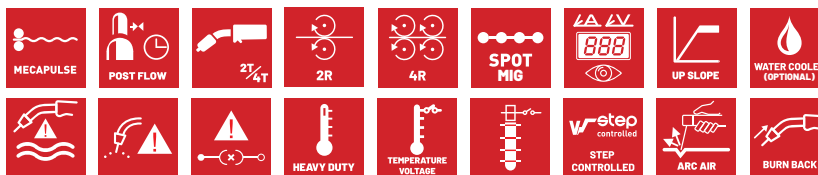

APPLICATIONS

- Heavy and medium metal workshops
- Metallic structures
- Solar and wind industry
- Shipbuilding and offshore
- Automobile industry
- Aerospace, railway, mining and oil industry
- Pipelines
- Services, repair and maintenance



Specifications

Model	MIG-306M
Power Voltage	415V±15%
Frequency	50/60Hz
Max. Primary Current	15.5A
Maximum Power (Kva)	10.7
No-load voltage (V)	16.5 - 38
Current Regulation (A)	30 - 280
Duty Cycle	280A @ 35% 210A @ 60% 170A @ 100%
No. Feeder Roll - Motor Power	4R - 50W
Adjustment Position	12
Insulation Protection	H
Insulation Class	IP21S
Weight (Kg)	78
Dimension (mm)	960 x 410 x 1340
Wire (Max)	0.8 - 1.0
Electrode (Max)	-

Come with accessories

- 3 Meters MIG Torch
- CO2 Heater Regulator with flowmeter
- 3 Meters Earth Clamp with standard cable
- Feeder unit with 8 Meters extension cable



Optional accessories

- 300 Ampere Orange Welding Cable (100% Copper)



Singapore HQ
Blk 6 Marsiling Industrial Estate Road 1
#01-14 Singapore 739275

www.danoxwelding.com
sales@danoxwelding.com
Tel: 6756 2801 WA: 9850 1419

Myanmar
No. 760A, Pyi Htaung Su, Main Road
65 Quarters, Industrial Zone (2) South Dagon
Yangon, Myanmar

www.danoxwelding.com
sales@danoxwelding.com

Indonesia- Pt. Inti Bangunan Perkasa
No. 15-17 Jalan Pelita 1, Batam, Kepulauan Riau
29453

Retail
Blok D, No. 5 Jalan Pembangunan 2, Komplek
Batama, Batam, Kepulauan Riau- 29432