


KEY FEATURES



Comes with Pulse function

- INVERTER IGBT
- WITH MMA FUNCTION, INCLUDE VRD, HOT START, ARC FORCE, ANTI-STICK
- PROGRAMMED CONTROL, FUNCTION ENCODER
- AUTOMATIC PARAMETER SAVING, 2T/4T
- REAL TIME DISPLAY OF WELDING CURRENT
- EXCELLENT PERFORMANCE WITH CONCENTRATED HEAT
- STABLE ARC WITHOUT SPATTER, GOOD SHAPING AND LESS DEFORMATION

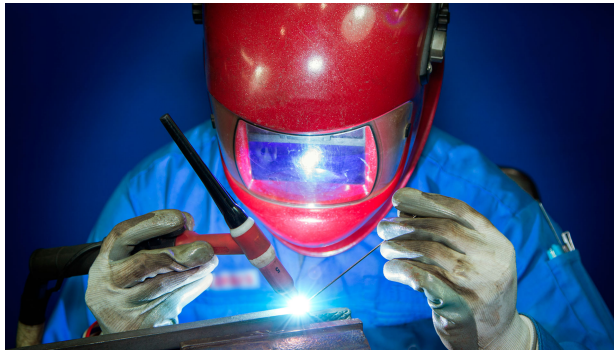

Specifications	
Model	TIG-200P ACDC
Power voltage	AC 230V ± 10%
Frequency	50/60Hz
No-load voltage	45V
Output current	10-200A
Rated output	-
Duty Cycle	60%
Efficiency	85%
Power factor	0.93
Insulation grade	F
Protection grade	IP21
Weight (power source)	14KG
Dimmension	460 x 222 x 415 mm
Tungsten Rod φ (max)	2.4 mm
Electrode φ (max)	-

Come with accessories
3 Meters Earth Clamp with standard cable
8 Meters WP26-25 Tig Torch Complete with accessories & Sleeve
Argon Regulator with flowmeter



Optional accessories
300 Ampere Orange Welding Cable (100% Copper)
3 Meters Electrode Holder with standard cable



Singapore HQ
Blk 6 Marsiling Industrial Estate Road 1
#01-14 Singapore 739275

www.danoxwelding.com
sales@danoxwelding.com
Tel: 6756 2801 WA: 9850 1419

Myanmar
No. 760A, Pyi Htaung Su, Main Road
65 Quarters, Industrial Zone (2) South Dagon
Yangon, Myanmar

www.danoxwelding.com
sales@danoxwelding.com

Indonesia- Pt. Inti Bangunan Perkasa
No. 15-17 Jalan Pelita 1, Batam, Kepulauan Riau
29453

Retail
Blok D, No. 5 Jalan Pembangunan 2, Komplek
Batama, Batam, Kepulauan Riau- 29432