




## KEY FEATURES

- INVERTER IGBT
- PROGRAMMED CONTROL, FUNCTION ENCODER
- AUTOMATIC PARAMETER SAVING, 2T/4T
- REAL TIME DISPLAY OF WELDING CURRENT
- EXCELLENT PERFORMANCE WITH CONCENTRATED HEAT
- STABLE ARC WITHOUT SPATTER, GOOD SHAPING AND LESS DEFORMATION

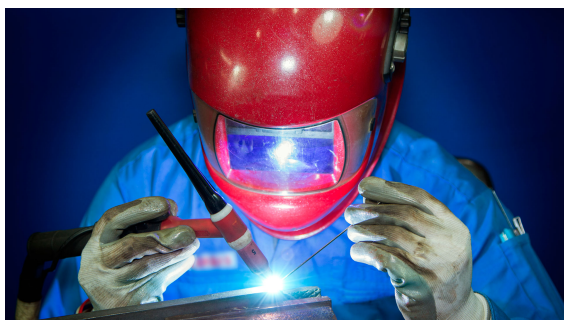

Specifications	
Model	TIG-315P ACDC
Power voltage	AC 380V ± 10%
Frequency	50/60Hz
No-load voltage	45V
Output current	5-310A
Rated output	-
Duty Cycle	60%
Efficiency	85%
Power factor	0.93
Insulation grade	F
Protection grade	IP21
Weight (power source)	34
Dimension	580 x 334 x 480 mm
Tungsten Rod φ (max)	3.2 mm
Electrode φ (max)	-

- Come with accessories**
- 3 Meters Earth Clamp with standard cable
  - 8 Meters WP26-25 Tig Torch Complete with accessories & Sleeve
  - Argon Regulator with flowmeter



- Optional accessories**
- 300 Ampere Orange Welding Cable (100% Copper)
  - WRC-300A Water Cooler Unit



Singapore HQ  
Blk 6 Marsiling Industrial Estate Road 1  
#01-14 Singapore 739275

www.danoxwelding.com  
sales@danoxwelding.com  
Tel: 6756 2801 WA: 9850 1419

Myanmar  
No. 760A, Pyi Htaung Su, Main Road  
65 Quarters, Industrial Zone (2) South Dagon  
Yangon, Myanmar

www.danoxwelding.com  
sales@danoxwelding.com

Indonesia- Pt. Inti Bangunan Perkasa  
No. 15-17 Jalan Pelita 1, Batam, Kepulauan Riau  
29453

Retail  
Blok D, No. 5 Jalan Pembangunan 2, Komplek  
Batama, Batam, Kepulauan Riau- 29432