




## FUNCTIONS

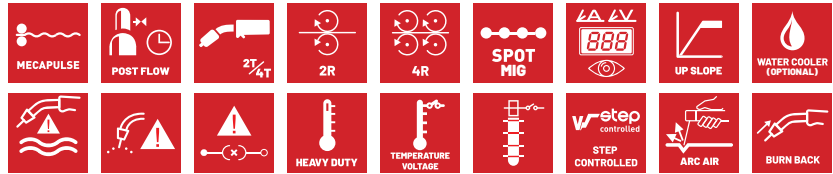

## APPLICATIONS

- Heavy and medium metal workshops
- Metallic structures
- Solar and wind industry
- Shipbuilding and offshore
- Automobile industry
- Aerospace, railway, mining and oil industry
- Pipelines
- Services, repair and maintenance



Specifications	
Model	MIG-556M
Power Voltage	400V±10%
Frequency	50/60Hz
Max. Primary Current	37.3A
Max. power	25.7Kva
No-load voltage	MIG: 19 - 43V ARC: 38 - 42V
Current Regulation	35 - 500A
Duty Cycle	60% @ 455A 100% @ 355A
Welding-wire diameter	Solid: 0.8 - 1.6 Fluxed: 0.9 - 2.4
Wire Feeder	4-Roll
Wire Speed	0.5 - 30m/min
Protection Grade	H
Insulation grade	IP21
Weight	163Kg
Dimension	1390 x 410 x 940

## Come with accessories

- 3 Meters MIG Torch
- CO2 Heater Regulator with flowmeter
- 3 Meters Earth Clamp with standard cable
- Feeder unit with 8 Meters extension cable



## Optional accessories

- 300 Ampere Orange Welding Cable (100% Copper)



**Singapore HQ**  
Blk 6 Marsiling Industrial Estate Road 1  
#01-14 Singapore 739275

**Myanmar**  
No. 760A, Pyi Htaung Su, Main Road  
65 Quarters, Industrial Zone (2) South Dagon  
Yangon, Myanmar

**Indonesia- Pt. Inti Bangunan Perkasa**  
No. 15-17 Jalan Pelita 1, Batam, Kepulauan Riau  
29453

**Showroom**  
No. 3 Soon Lee Street, Pioneer  
Junction #01-37 Singapore 627606

www.danoxwelding.com  
sales@danoxwelding.com

**Retail**  
Blok D, No. 5 Jalan Pembangunan 2, Komplek  
Batama, Batam, Kepulauan Riau- 29432