



Inverter plasma cutting machines for all conductive metals such as mild steel, stainless steel, brass, copper and aluminum.

The continuous current adjustment enables very fast, narrow and smooth cutting seam.

Reliable arc ignition without high frequency.


Suitable for hand or mechanized cutting of plates and tubes.

Portable and ideal for construction, demolition, repair and maintenance shops.

APPLICATIONS

- Construction
- Demolition
- Repair and maintenance shops

FUNCTIONS

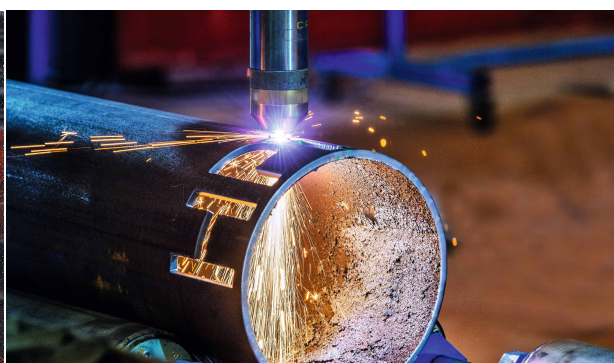

Specifications	
Model	PCUT-63
Input Voltage	400V±10%
Frequency	50/60Hz
Max. Primary Current	12A
Max. Input Power	6.8Kw
No-load Voltage	300V
Current Regulation	20-60A
Max. Cutting Thickness (Steel)	≤ 35mm
Recommended Cutting Thickness	Steel: ≤ 30mm Stainless Steel: ≤ 25mm Aluminum: ≤ 20mm Copper: ≤ 15mm
Duty Cycle	40% @ 60A 100% @ 38A
Housing Protection Grade	IP21S
Insulation Class	H
Weight	14Kg
Dimention (A x L x C)	315 x 180 x 485

Come with accessories

- Plasma Hand Torch Complete with accessories
- Air filter regulator
- 3 Meters Earth Clamp with standard cable



Optional accessories

- 300 Ampere Orange Welding Cable (100% Copper)



Singapore HQ
Blk 6 Marsiling Industrial Estate Road 1
#01-14 Singapore 739275

Myanmar
No. 760A, Pyi Htaung Su, Main Road
65 Quarters, Industrial Zone (2) South Dagon
Yangon, Myanmar

Indonesia- Pt. Inti Bangunan Perkasa
No. 15-17 Jalan Pelita 1, Batam, Kepulauan Riau
29453

Showroom
No. 3 Soon Lee Street, Pioneer
Junction #01-37 Singapore 627606

www.danoxwelding.com
sales@danoxwelding.com

Retail
Blok D, No. 5 Jalan Pembangunan 2, Komplek
Batama, Batam, Kepulauan Riau- 29432