



Inverter plasma cutting machines for all conductive metals such as mild steel, stainless steel, brass, copper and aluminum.

The continuous current adjustment enables very fast, narrow and smooth cutting seam.

Reliable arc ignition without high frequency.


Suitable for hand or mechanized cutting of plates and tubes.

Portable and ideal for construction, demolition, repair and maintenance shops.

APPLICATIONS

- Construction
- Demolition
- Repair and maintenance shops

FUNCTIONS

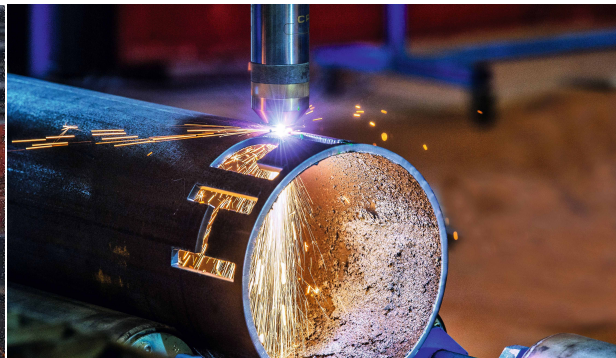

Specifications

MODEL	POWERCUT-70
Input Voltage (V)	400V ± 15%
Frequency (Hz)	50/60
Max. Current (A)	15-19
Input Power (Kva)	13.2
No-Load Voltage (V)	300
Current Range (A)	50-70
Recommended Cutting (mm)	15
Maximum Cutting (mm)	18
Seperation Cutting (mm)	25
Duty Cycle	60% @ 70A, 100% 50A
Airflow @ (Lpm/Bar)	50
Protection Class	IP23S
Insulation Class	H/F
Weight (Kg)	16
Dimension (mm)	360 x 490 x 175

Come with accessories

Plasma Hand Torch Complete with accessories

Air filter regulator

3 Meters Earth Clamp with standard cable



Optional accessories

300 Ampere Orange Welding Cable (100% Copper)



Singapore HQ
Blk 6 Marsiling Industrial Estate Road 1
#01-14 Singapore 739275

Showroom
No. 3 Soon Lee Street, Pioneer
Junction #01-37 Singapore 627606

Myanmar
No. 760A, Pyi Htaung Su, Main Road
65 Quarters, Industrial Zone (2) South Dagon
Yangon, Myanmar

www.danoxwelding.com
sales@danoxwelding.com

Indonesia- Pt. Inti Bangunan Perkasa
No. 15-17 Jalan Pelita 1, Batam, Kepulauan Riau
29453

Retail
Blok D, No. 5 Jalan Pembangunan 2, Komplek
Batama, Batam, Kepulauan Riau- 29432